



## MICROPROCESSOR BARGRAPHIC DISPLAY SCALING METER



## FEATURES

Adapts microprocessor control circuit, modular design, advanced digital calibration, and switching power supply technology.

Modulized design is a concept to adapt different analog input signals by means of changing different signal board (such as temperature, pressure, alternating voltage, electric current.). Also, optional output board could add the analog output signal (isolated). By using advanced digital calibration capability, its analog input/output could be accurate to  $\pm 1$  bit.

### PB SERIES---BARGRAPH DISPLAY

It is easy to tell the measuring, operator can tell measuring range easily by eyesight even in the remote site.

Provides not only 4 digits numerical display with bargraph analog output indicator but also 6 relay setting points. It makes users to tell Process setting position without difficulties by bargraph indicator. In general, it is an easy applied and understand model to customers.

PB-2471 is designed for dual channel applications. It can measure 2 input signals simultaneously by only one meter. Also, it supports 2 channels analog output signals and 4 relay contacts. To users, it provides both convenient panel layout operation and relatively lower cost when compared with using two panel meters.

PB-1570 and PB-1470 are horizontal mounting design, all functions are same as vertical models.

### PM SERIES---DIGITAL DISPLAY

PM-2430 is designed for dual channel applications. It can measure 2 input signals simultaneously by only one meter. Also, it supports 2 channels analog output signals and 2 relay contacts. To users, it provides both convenient panel layout operation and relatively lower cost when compared with using two panel meters.

PM-1530/1430 are single channel models with 5-digit or 4 digit LED display respectively.




# Non-linear Tank Volume Conversion Feature

## NON-LINEAR TANK VOLUME CONVERSION FEATURE

PM/PB Series support volume adjustment function for non-linear tanks. By means of a 20-point look-up table, panel meter calculate tank volume according to the material level measured.



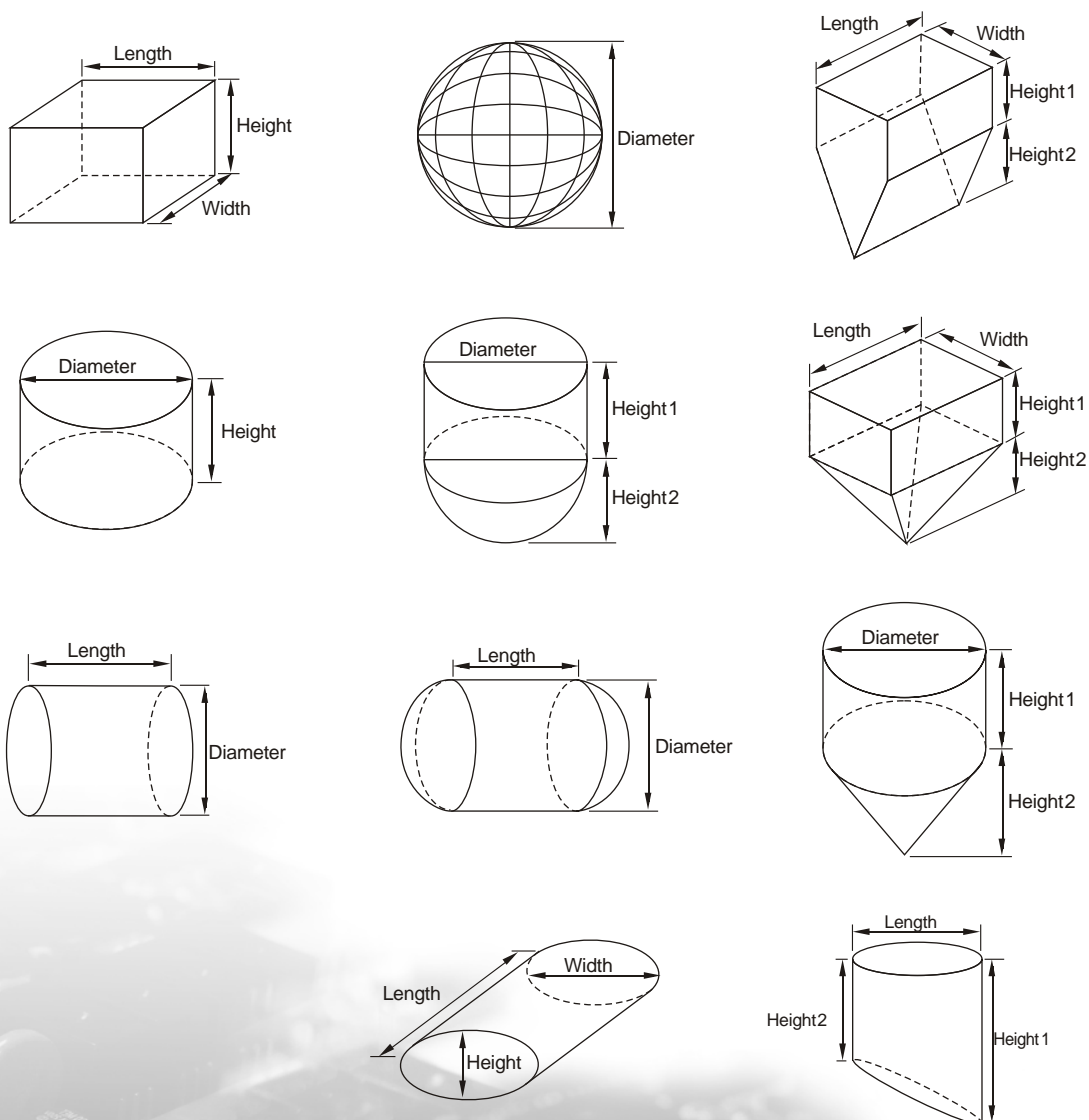

Bundled with this package, a software is provided, user simply select tank type shown as below, and enter necessary dimension, tank volume and 20 control points will be calculated and reported.

### TANK TYPE:






# Specifications

## Microprocessor Bargraph Display Panel Meter

Appearance				
Dimension (mm)	48 (W) x144 (H) x121.5 (D) DIN 3/16	48 (W) x144 (H) x121.5 (D) DIN 3/16	144 (W) x48 (H) x121.5 (D) DIN 3/16	144 (W) x48 (H) x121.5 (D) DIN 3/16
Model	PB-2471	PB-1471	PB-1470	PB-1570
Display	Dual Row 4-digit 7-segment LED Dual Column 101-segment LED Bargraph Display Totally 8 Set Points	4 Digits 7-Segment LED 101 LED Bargraph Display Totally 6 Set Points	4 Digits 7-Segment LED 101 LED Bargraph Display Totally 6 Set Points	5 Digits 7-Segment LED 101 LED Bargraph Display Totally 6 Set Points
Standard	Display Range	-1999 ~ +9999 °	-1999 ~ +9999 °	-19999 ~ +32767 °
	Input Signal	20mA, 200mA, 5V, 10V, 20V ,200V (Refer to Input Signal Setting)	20mA, 200mA, 5V, 10V, 20V ,200V (Refer to Input Signal Setting)	20mA, 200mA, 5V, 10V, 20V ,200V (Refer to Input Signal Setting)
	Relay Contact	4 Relay	4 Relay	4 Relay
	Power Supply	85 ~ 265V AC or 18 ~ 36V DC	85 ~ 265V AC or 18 ~ 36V DC	85 ~ 265V AC or 18 ~ 36V DC
Optional	Relay	Expand to 8 Relay	Expand to 6 Relay	Expand to 6 Relay
	Analog Output	4~20mA, 0~20mA, 2~10V and 0~10V	4~20mA, 0~20mA, 2~10V and 0~10V	4~20mA, 0~20mA, 2~10V and 0~10V
	Communication port	RS-485 (Modbus)	RS-485 (Modbus)	RS-485 (Modbus)
	Non-Linear Function	Non-Linear Tank Volume Conversion Feature	Non-Linear Tank Volume Conversion Feature	Non-Linear Tank Volume Conversion Feature
Page	A05	A06	A07	A08

## Microprocessor Digit Display Panel Meter

<b>Appearance</b>				
<b>Dimension (mm)</b>		96 (W) x48 (H) x128.5 (D) DIN 1/8	96 (W) x48 (H) x128.5 (D) DIN 1/8	96 (W) x48 (H) x128.5(D) DIN 1/8
<b>Model</b>		PM-1430	PM-2430	PM-1530
<b>Display</b>		4 Digits 7-Segment LED Totally 4 Set Points	Dual Channel Signal Input Dual 4 Digits LED Numeric Display Totally 4 Set Points	5 Digits 7-Segment LED Totally 4 Set Points
<b>Standard</b>	Display Range	-1999 ~ +9999 °	-1999 ~ +9999 °	-19999 ~ +32767 °
	Input Signal	20mA, 200mA, 5V, 10V, 20V ,200V (Refer to Input Signal Setting)	20mA, 200mA, 5V, 10V, 20V ,200V (Refer to Input Signal Setting)	20mA, 200mA, 5V, 10V, 20V ,200V (Refer to Input Signal Setting)
	Relay Contact	2 Relay	4 Relay	2 Relay
	Power Supply	85 ~ 265V AC or 18 ~ 36V DC	85 ~ 265V AC or 18 ~ 36V DC	85 ~ 265V AC or 18 ~ 36V DC
<b>Optional</b>	Relay	Expand to 4 Relay	—————	Expand to 4 Relay
	Analog Output	4~20mA, 0~20mA, 2~10V and 0~10V	4~20mA, 0~20mA, 2~10V and 0~10V	4~20mA, 0~20mA, 2~10V and 0~10V
	Communication port	RS-485 (Modbus)	RS-485 (Modbus)	RS-485 (Modbus)
	Non-Linear Function	Non-Linear Tank Volume Conversion Feature	Non-Linear Tank Volume Conversion Feature	Non-Linear Tank Volume Conversion Feature
<b>Page</b>		A09	A10	A11

# PB-2471 Microprocessor Bargraph Display Panel Meter



### FEATURES:


- Dual 4 Digits LED Numeric Display
- Dual 101-segment LED Bargraph display
- Wide Range of User Definable Scaling Ratio
- Modulized input signal boards available for different applications
- Optional Output Boards with Isolated Analog Output & Relay Output
- 85V~265VAC or 18~36VDC Switching Power Supply
- Support volume adjustment function for non-linear tanks (optional)

## SPECIFICATIONS


Dimension (mm)	<b>48 (W) x144 (H) x121.5 (D) DIN 3/16</b>
Model	<b>PB-2471</b>
Power Supply	85 ~ 265V AC or 18~36V DC Switching Power Supply
Power Supply for sensor	DC24V, 50mA
Display	Dual 4 Digits, 0.36" 7-Segment LED Display 101 LED Bargraph Display 4 LED set-point indicator Display Range: -1999 ~ +9999 Over Range Display: "1" or "-1"
Input Signal	Range: Refer to Ordering information Accuracy: 0.1%FS or $\pm 1$ digit ADC Resolution: 4-1/2 digit Sampling Rate: 2 samples/second/channel
Relay Contact	4 relay (up to 8 relay) 3A/250V AC or 5A/30V DC (N.C. / N.O. Jumper selectable)
Analog Output	4~20mA, 0~20mA, 2~10V and 0~10V (optional)
Communication port	RS485 (optional) Modbus Protocol
Operating condition	0~50°C(20 to 90% RH non-condensed)
Storage condition	0~70°C(20 to 90% RH non-condensed)

## TERMINAL

**ARRANGEMENTS:**

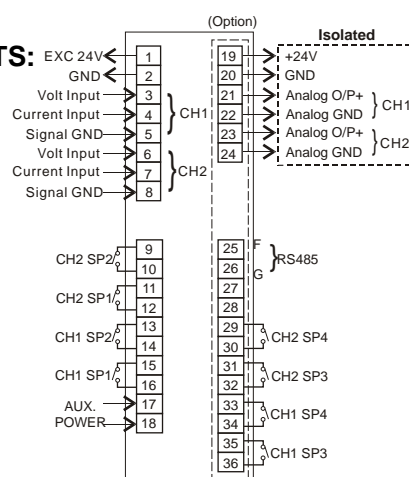

### EXTERIOR/CUTOUT DIMENSIONS (Unit:mm)

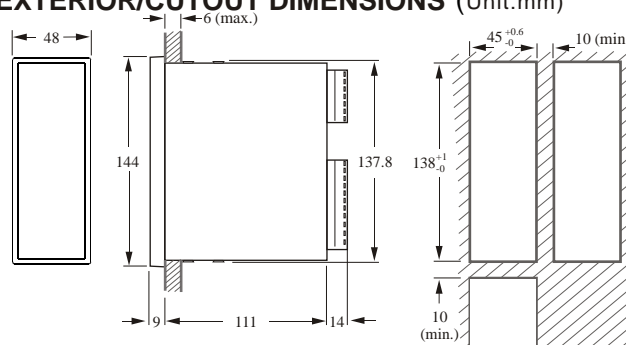

### ORDERING INFORMATION:

PB-2471-□□□-□□□□

[illegible]

**Ex:** PB-2471-S14-4000

Represents: PB-2471 Model, Power supply 85~265V AC,  
Analog input signal, CH1: 4~20mA, CH2: 0~5V,  
4 relay contact, without Non-Linear Function,  
without Analog output.



# PB-1471 Microprocessor Bargraph Display Panel Meter



## FEATURES:

- 4 Digits LED Numeric Display
- 101-segment LED Bargraph display
- Wide Range of User Definable Scaling Ratio
- Modulized input signal boards available for different applications
- Optional Output Boards with Isolated Analog Output & Relay Output
- 85V~265VAC or 18~36VDC Switching Power Supply
- Support volume adjustment function for non-linear tanks (optional)

## SPECIFICATIONS

Dimension (mm) **48 (W) x144 (H) x121.5 (D) DIN 3/16**

Model **PB-1471**

Power Supply 85 ~ 265V AC or 18~36V DC  
Switching Power Supply

Power Supply for sensor DC24V, 50mA

Display 4 Digits, 0.36" 7-Segment red LED Display

101 LED Bargraph Display  
6 LED set-point indicator  
Display Range: -1999 ~ +9999  
Over Range Display: "1" or "-1"

Input Signal Range: Refer to Ordering information  
Accuracy: 0.1%FS or  $\pm 1$  digit  
ADC Resolution: 4-1/2 digit  
Sampling Rate:  
2 samples/second/channel

Relay Contact 4 relay (up to 6 relay)  
3A/250V AC or 5A/30V DC  
(N.C. / N.O. Jumper selectable)

Analog Output 4~20mA, 0~20mA, 2~10V and 0~10V (optional)


Communication port RS485 (optional) Modbus Protocol

Operating condition 0~50°C (20 to 90% RH non-condensed)


Storage condition 0~70°C (20 to 90% RH non-condensed)

## TERMINAL

### ARRANGEMENTS:

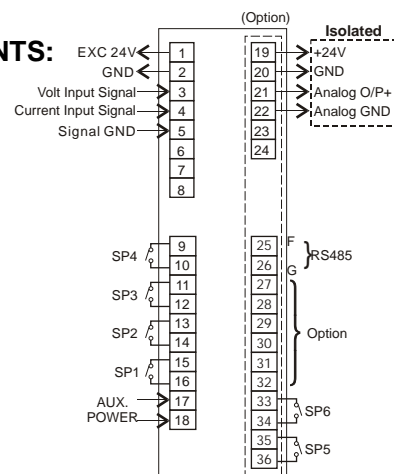

## EXTERIOR/CUTOUT DIMENSIONS

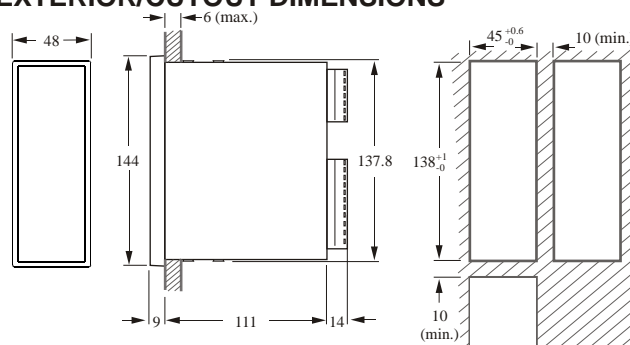

## ORDERING INFORMATION:

**PB-1471-□□□□□□□□**

Power Supply	S---85~265V AC T---18~36V DC								
Input Signal	01---4~20mA DC with Exc 24V 02---0~20 mA DC with Exc 24V 03---0~200 mA DC with Exc 24V 04---5V DC with Exc 24V 05---10V DC with Exc 24V 06---20V DC with Exc 24V 07---200V DC with Exc 24V  A1---2mA AC RMS A2---20mA AC RMS A3---200mA AC RMS A4---1A AC RMS A5---5A AC RMS  B1---100mV AC RMS B2---200mV AC RMS B3---2V AC RMS B4---20V AC RMS B5---200V AC RMS B6---600V AC RMS  C1---±2 mA DC with Exc 24V C2---±20 mA DC with Exc 24V C3---±200 mA DC with Exc 24V C4---±1Amp DC C5---±5Amp DC  D1---±20mV DC with Exc 24V D2---±50mV DC with Exc 24V D3---±100mV DC with Exc 24V D4---±200mV DC with Exc 24V								
Relay Contact	0---0 Relays 4---4 Relays 6---6 Relays								
Non-Linear Function	0---Without (Standard) 1---Support 20 points Vessel Conversion								
Analog Output	0---Without 1---0~10V Analog Output 2---0/4~20mA or 0~10V Output (jumperselectable) 5---Dual Analog output, 0~10V 6---Dual Analog output, 0/4~20mA or 0~10V (jumperselectable)								
Communication port	0---Without 1---Support RS485 interface								

**EX:** PB-1471-S01-4101

Represents: PB-1471 Model, Power supply 85~265V AC, Analog input signal 4~20mA, 4 relay contact, Support Non-Linear Function, without Analog output, Support RS485 interface.

# PB-1470 Microprocessor Bargraph Display Panel Meter



## FEATURES:

- 4 Digits LED Numeric Display
- 101-segment LED Bargraph display
- Wide Range of User Definable Scaling Ratio
- Modulized input signal boards available for different applications
- Optional Output Boards with Isolated Analog Output & Relay Output
- 85V~265VAC or 18~36VDC Switching Power Supply
- Support volume adjustment function for non-linear tanks (optional)

## SPECIFICATIONS

Dimension (mm) **144 (W) x48 (H) x121.5 (D) DIN 3/16**

Model **PB-1470**

Power Supply 85 ~ 265V AC or 18~36V DC  
Switching Power Supply

Power Supply for sensor DC24V, 50mA

Display 4 Digits, 0.56" 7-Segment red LED Display

101 LED Bargraph Display

6 LED set-point indicator

Display Range: -1999 ~ +9999

Over Range Display: "1" or "-1"

Input Signal Range: Refer to Ordering information

Accuracy: 0.1%FS or  $\pm 1$  digit

ADC Resolution: 4-1/2 digit

Sampling Rate:

2 samples/second/channel

Relay Contact 4 relay (up to 6 relay)  
3A/250V AC or 5A/30V DC  
(N.C. / N.O. Jumper selectable)


Analog Output 4~20mA, 0~20mA, 2~10V and 0~10V (optional)

Communication port RS485 (optional) Modbus Protocol


Operating condition 0~50°C(20 to 90% RH non-condensed)

Storage condition 0~70°C(20 to 90% RH non-condensed)

## TERMINAL ARRANGEMENTS:

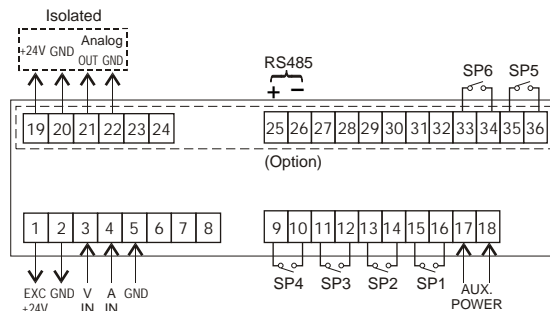

## EXTERIOR/CUTOUT DIMENSIONS

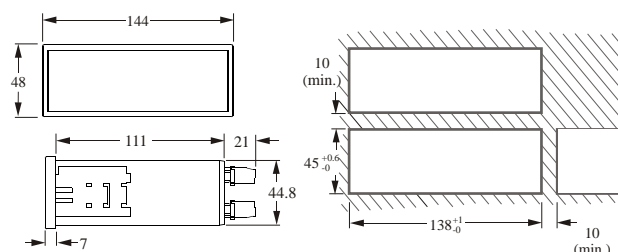

## ORDERING INFORMATION:

PB-1470-□□□□□□□□

Power Supply	S---85~265V AC T---18~36V DC								
Input Signal	01---4~20mA DC with Exc 24V 02---0~20 mA DC with Exc 24V 03---0~200 mA DC with Exc 24V 04---5V DC with Exc 24V 05---10V DC with Exc 24V 06---20V DC with Exc 24V 07---200V DC with Exc 24V  A1---2mA AC RMS A2---20mA AC RMS A3---200mA AC RMS A4---1A AC RMS A5---5A AC RMS  B1---100mV AC RMS B2---200mV AC RMS B3---2V AC RMS B4---20V AC RMS B5---200V AC RMS B6---600V AC RMS  C1---± 2 mA DC with Exc 24V C2---± 20 mA DC with Exc 24V C3---± 200 mA DC with Exc 24V C4---± 1Amp DC C5---± 5Amp DC  D1---± 20mV DC with Exc 24V D2---± 50mV DC with Exc 24V D3---± 100mV DC with Exc 24V D4---± 200mV DC with Exc 24V								
Relay Contact	0---0 Relays 4---4 Relays 6---6 Relays								
Non-Linear Function	0---Without (Standard) 1---Support 20 points Vessel Conversion								
Analog Output	0---Without 1---0~10V Analog Output 2---0/4~20mA or 0~10V Output (jumperselectable) 5---Dual Analog output, 0~10V 6---Dual Analog output, 0/4~20mA or 0~10V (jumperselectable)								
Communication port	0---Without 1---Support RS485 interface								

EX: PB-1470-S01-4101

Represents: PB-1470 Model, Power supply 85~265V AC, Analog input signal 4~20mA, 4 relay contact, Support Non-Linear Function, without Analog output, Support RS485 interface.



# PB-1570 Microprocessor Bargraph Display Panel Meter



## FEATURES:

- 5 Digits LED Numeric Display
- 101-segment LED Bargraph display
- Wide Range of User Definable Scaling Ratio
- Modulized input signal boards available for different applications
- Optional Output Boards with Isolated Analog Output & Relay Output
- 85V~265VAC or 18~36VDC Switching Power Supply
- Support volume adjustment function for non-linear tanks (optional)

## SPECIFICATIONS

Dimension (mm) **144 (W) x48 (H) x121.5 (D) DIN 3/16**

Model **PB-1570**

Power Supply **85 ~ 265V AC or 18~36V DC**  
Switching Power Supply

Power Supply for sensor **DC24V, 50mA**

Display **5 Digits, 0.56" 7-Segment red LED Display**

**101 LED Bargraph Display**  
**6 LED set-point indicator**  
**Display Range: -19999 ~ +32767**  
**Over Range Display: "1" or "-1"**

Input Signal **Range: Refer to Ordering information**  
**Accuracy: 0.1%FS or  $\pm 1$  digit**  
**ADC Resolution: 4-1/2 digit**  
**Sampling Rate: 2 samples/second/channel**

Relay Contact **4 relay (up to 6 relay)**  
**3A/250V AC or 5A/30V DC**  
**(N.C. / N.O. Jumper selectable)**


Analog Output **4~20mA, 0~20mA, 2~10V and 0~10V (optional)**

Communication port **RS485 (optional) Modbus Protocol**


Operating condition **0~50°C(20 to 90% RH non-condensed)**

Storage condition **0~70°C(20 to 90% RH non-condensed)**

## TERMINAL ARRANGEMENTS:

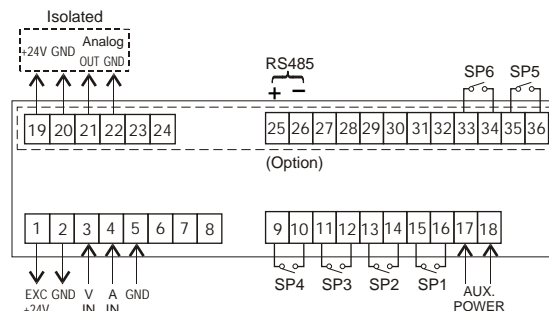

## EXTERIOR/CUTOUT DIMENSIONS

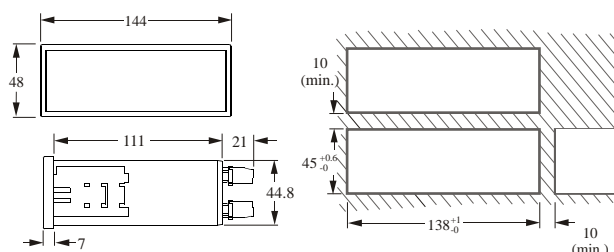

## ORDERING INFORMATION:

**PB-1570-□□□□□□□□**

Power Supply	S---85~265V AC T---18~36V DC								
Input Signal	01---4~20mA DC with Exc 24V 02---0~20 mA DC with Exc 24V 03---0~200 mA DC with Exc 24V 04---5V DC with Exc 24V 05---10V DC with Exc 24V 06---20V DC with Exc 24V 07---200V DC with Exc 24V  A1---2mA AC RMS A2---20mA AC RMS A3---200mA AC RMS A4---1A AC RMS A5---5A AC RMS  B1---100mV AC RMS B2---200mV AC RMS B3---2V AC RMS B4---20V AC RMS B5---200V AC RMS B6---600V AC RMS  C1---±2 mA DC with Exc 24V C2---±20 mA DC with Exc 24V C3---±200 mA DC with Exc 24V C4---±1Amp DC C5---±5Amp DC  D1---±20mV DC with Exc 24V D2---±50mV DC with Exc 24V D3---±100mV DC with Exc 24V D4---±200mV DC with Exc 24V								
Relay Contact	0---0 Relays 4---4 Relays 6---6 Relays								
Non-Linear Function	0---Without (Standard) 1---Support 20 points Vessel Conversion								
Analog Output	0---Without 1---0~10V Analog Output 2---0/4~20mA or 0~10V Output (jumperselectable) 5---Dual Analog output, 0~10V 6---Dual Analog output, 0/4~20mA or 0~10V (jumperselectable)								
Communication port	0---Without 1---Support RS485 interface								

**EX:** PB-1570-S01-4101

Represents: PB-1570 Model, Power supply 85~265V AC, Analog input signal 4~20mA, 4 relay contact, Support Non-Linear Function, without Analog output, Support RS485 interface.

# PM-1430 Microprocessor Digit Display Panel Meter



## FEATURES:

- 4 Digits LED Numeric Display
- Wide Range of User Definable Scaling Ratio
- Modulized input signal boards available for different applications
- Optional Output Boards with Isolated Analog Output & Relay Output
- 85V~265VAC or 18~36VDC Switching Power Supply
- Support volume adjustment function for non-linear tanks (optional)
- IP54 Class front panel

## SPECIFICATIONS

Dimension (mm) **96 (W) x48 (H) x128.5 (D) DIN 1/8**

Model **PM-1430**

Power Supply 85 ~ 265V AC or 18~36V DC  
Switching Power Supply

Power Supply for sensor DC24V, 50mA

Display 4 Digits, 0.56" 7-Segment red LED Display

4 LED set-point indicator  
Display Range: -1999 ~ +9999  
Over Range Display: "1" or "-1"

Input Signal Range: Refer to Ordering information  
Accuracy: 0.1%FS or  $\pm 1$  digit  
ADC Resolution: 4-1/2 digit  
Sampling Rate:  
2 samples/second/channel

Relay Contact 2 or 4 relay  
3A/250V AC or 5A/30V DC  
(N.C. / N.O. Jumper selectable)


Analog Output 4~20mA, 0~20mA, 2~10V and 0~10V (optional)

Communication port RS485 (optional) Modbus Protocol


Operating condition 0~50°C(20 to 90% RH non-condensed)

Storage condition 0~70°C(20 to 90% RH non-condensed)

## TERMINAL ARRANGEMENTS:

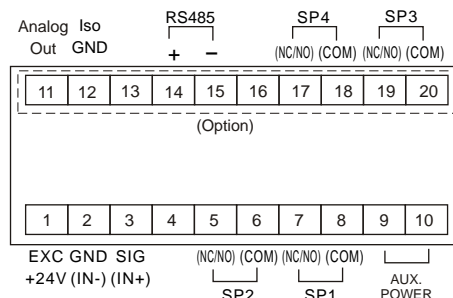

## EXTERIOR/CUTOUT DIMENSIONS

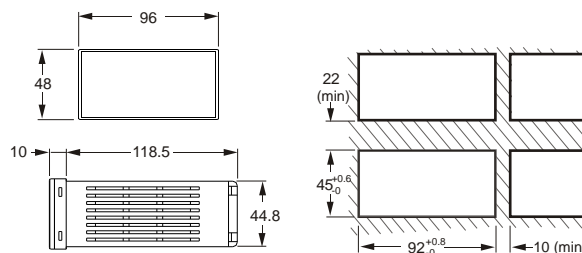

## ORDERING INFORMATION:

PM-1430-□□□□□□□□

Power Supply	S---85~265V AC T---18~36V DC								
Input Signal	01---4~20mA DC with Exc 24V 02---0~20 mA DC with Exc 24V 03---0~200 mA DC with Exc 24V 04---5V DC with Exc 24V 05---10V DC with Exc 24V 06---20V DC with Exc 24V 07---200V DC with Exc 24V  A1---2mA AC RMS A2---20mA AC RMS A3---200mA AC RMS A4---1A AC RMS A5---5A AC RMS  B1---100mV AC RMS B2---200mV AC RMS B3---2V AC RMS B4---20V AC RMS B5---200V AC RMS B6---600V AC RMS  C1---± 2 mA DC with Exc 24V C2---± 20 mA DC with Exc 24V C3---± 200 mA DC with Exc 24V C4---± 1Amp DC C5---± 5Amp DC  D1---± 20mV DC with Exc 24V D2---± 50mV DC with Exc 24V D3---± 100mV DC with Exc 24V D4---± 200mV DC with Exc 24V								
Relay Contact	0---0 Relays 2---2 Relays 4---4 Relays								
Non-Linear Function	0---Without (Standard) 1---Support 20 points Vessel Conversion								
Analog Output	0---Without 1---0~10V Analog Output 2---0/4~20mA or 0~10V Output (jumperselectable) 5---Dual Analog output, 0~10V 6---Dual Analog output, 0/4~20mA or 0~10V (jumperselectable)								
Communication port	0---Without 1---Support RS485 interface								

EX: PM-1430-S01-4101

Represents: PM-1430 Model, Power supply 85~265V AC, Analog input signal 4~20mA, 4 relay contact, Support Non-Linear Function, without Analog output, Support RS485 interface.

# PM-2430 Microprocessor Digit Display Panel Meter




## FEATURES:

- Dual Channel Signal Input
- Dual 4 Digits LED Numeric Display
- Wide Range of User Definable Scaling Ratio
- Modulized input signal boards available for different applications
- Optional Output Boards with Isolated Analog Output & Relay Output
- 85V~265VAC or 18~36VDC Switching Power Supply
- Support volume adjustment function for non-linear tanks (optional)
- IP54 Class front panel


## SPECIFICATIONS

Dimension (mm)	96 (W) x48 (H) x128.5 (D) DIN 1/8
Model	PM-2430
Power Supply	85 ~ 265V AC or 18~36V DC Switching Power Supply
Power Supply for sensor	DC24V, 50mA
Display	CH1: 4 Digits, 0.36" 7-Segment red LED CH2: 4 Digits, 0.36" 7-Segment green LED 4 LED set-point indicator Display Range: -1999 ~ +9999 Over Range Display: "1" or "-1"
Input Signal	Range: Refer to Ordering information Accuracy: 0.1%FS or $\pm 1$ digit ADC Resolution: 4-1/2 digit Sampling Rate: 2 samples/second/channel
Relay Contact	4 relay 3A/250V AC or 5A/30V DC (N.C. / N.O. Jumper selectable)
Analog Output	4~20mA, 0~20mA, 2~10V and 0~10V (optional)
Communication port	RS485 (optional) Modbus Protocol
Operating condition	0~50°C(20 to 90% RH non-condensed)
Storage condition	0~70°C(20 to 90% RH non-condensed)

## TERMINAL ARRANGEMENTS:

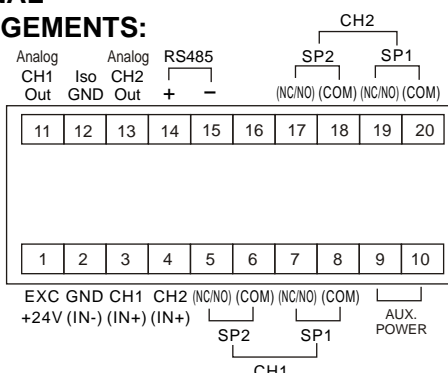

## EXTERIOR/CUTOUT DIMENSIONS

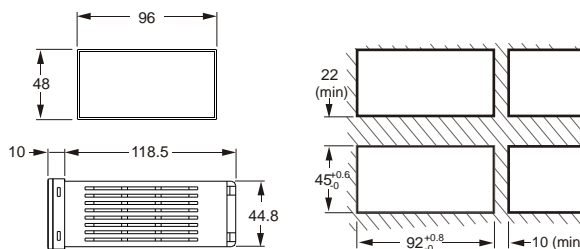

## ORDERING INFORMATION:

PM-2430-□□□-□□□□

Power Supply	S---85~265V AC T---18~36V DC								
Input Signal (CH1)	1---4~20mA DC with Exc 24V 2---0~20 mA DC with Exc 24V 3---0~200 mA DC with Exc 24V 4---5V DC with Exc 24V 5---10V DC with Exc 24V 6---20V DC with Exc 24V 7---200V DC with Exc 24V								
Input Signal (CH2)	1---4~20mA DC with Exc 24V 2---0~20 mA DC with Exc 24V 3---0~200 mA DC with Exc 24V 4---5V DC with Exc 24V 5---10V DC with Exc 24V 6---20V DC with Exc 24V 7---200V DC with Exc 24V								
Relay Contact	0---0 Relays 4---4 Relays								
Non-Linear Function	0---Without (Standard) 1---Support 20 points Vessel Conversion								
Analog Output	0---Without 1---0~10V Analog Output 2---0/4~20mA or 0~10V Output (jumperselectable) 5---Dual Analog output, 0~10V 6---Dual Analog output, 0/4~20mA or 0~10V (jumperselectable)								
Communication port	0---Without 1---Support RS485 interface								

**EX:** PM-2430-S14-4000

Represents: PM-2430 Model, Power supply 85~265V AC, Analog input signal CH1: 4~20mA , CH2: 0~5V, 4 relay contact, without Non-Linear Function, without Analog output.

# PM-1530 Microprocessor Digit Display Panel Meter



## FEATURES:

- 5 Digits LED Numeric Display
- Wide Range of User Definable Scaling Ratio
- Modulized input signal boards available for different applications
- Optional Output Boards with Isolated Analog Output & Relay Output
- 85V~265VAC or 18~36VDC Switching Power Supply
- Support volume adjustment function for non-linear tanks (optional)
- IP54 Class front panel

## SPECIFICATIONS

Dimension (mm) **96 (W) x48 (H) x128.5 (D) DIN 1/8**

Model **PM-1430**

Power Supply 85 ~ 265V AC or 18~36V DC  
Switching Power Supply

Power Supply for sensor DC24V, 50mA

Display 5 Digits, 0.56" 7-Segment red LED Display  
4 LED set-point indicator  
Display Range: -19999 ~ +32767  
Over Range Display: "1" or "-1"

Input Signal Range: Refer to Ordering information  
Accuracy: 0.1%FS or  $\pm 1$  digit  
ADC Resolution: 4-1/2 digit  
Sampling Rate:  
2 samples/second/channel

Relay Contact 2 or 4 relay  
3A/250V AC or 5A/30V DC  
(N.C. / N.O. Jumper selectable)


Analog Output 4~20mA, 0~20mA, 2~10V and 0~10V (optional)

Communication port RS485 (optional) Modbus Protocol


Operating condition 0~50°C(20 to 90% RH non-condensed)

Storage condition 0~70°C(20 to 90% RH non-condensed)

## TERMINAL ARRANGEMENTS:

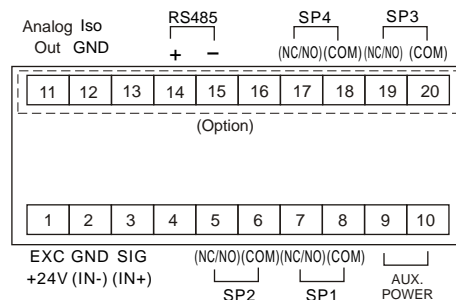

## EXTERIOR/CUTOUT DIMENSIONS

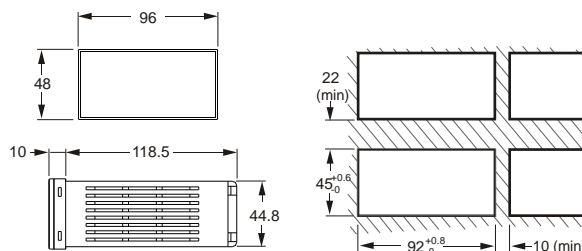

## ORDERING INFORMATION:

PM-1530-□□□□□□□□

Power Supply	S---85~265V AC T---18~36V DC								
Input Signal	01---4~20mA DC with Exc 24V 02---0~20 mA DC with Exc 24V 03---0~200 mA DC with Exc 24V 04---5V DC with Exc 24V 05---10V DC with Exc 24V 06---20V DC with Exc 24V 07---200V DC with Exc 24V  A1---2mA AC RMS A2---20mA AC RMS A3---200mA AC RMS A4---1A AC RMS A5---5A AC RMS  B1---100mV AC RMS B2---200mV AC RMS B3---2V AC RMS B4---20V AC RMS B5---200V AC RMS B6---600V AC RMS  C1---±2 mA DC with Exc 24V C2---±20 mA DC with Exc 24V C3---±200 mA DC with Exc 24V C4---±1Amp DC C5---±5Amp DC  D1---±20mV DC with Exc 24V D2---±50mV DC with Exc 24V D3---±100mV DC with Exc 24V D4---±200mV DC with Exc 24V								
Relay Contact	0---0 Relays 2---2 Relays 4---4 Relays								
Non-Linear Function	0---Without (Standard) 1---Support 20 points Vessel Conversion								
Analog Output	0---Without 1---0~10V Analog Output 2---0/4~20mA or 0~10V Output (jumperselectable) 5---Dual Analog output, 0~10V 6---Dual Analog output, 0/4~20mA or 0~10V (jumperselectable)								
Communication port	0---Without 1---Support RS485 interface								

EX: PM-1530-S01-4101


Represents: PM-1530 Model, Power supply 85~265V AC, Analog input signal 4~20mA, 4 relay contact, Support Non-Linear Function, without Analog output, Support RS485 interface.

# SIM (Signal Input Module)


This section will elaborate how to adapt to different input signals in the PB series panel meter, by using the correct jumper and using iSEL command. Panel meter series can accommodate 6 types of conventional input signals, 20mA, 200mA, 5V, 10V, 20V, 200V, please refer below for setup.

## Dual Channel Signal Input Module: (for Dual Channel Models)


11: 4~20mA DC with Excitation +24V

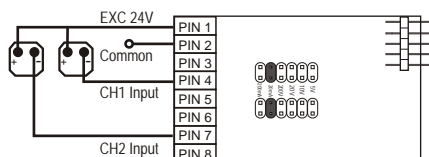


22: 0~20mA DC with Excitation +24V

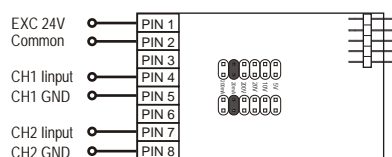


33: 0~200mA DC with Excitation +24V

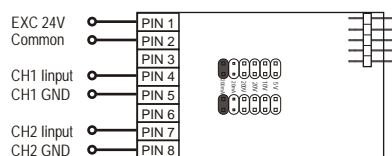


44:  $\pm 5V$  DC with Excitation +24V

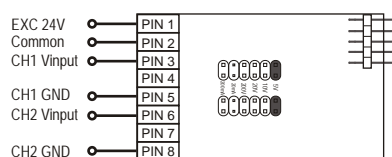


55:  $\pm 10V$  DC with Excitation +24V

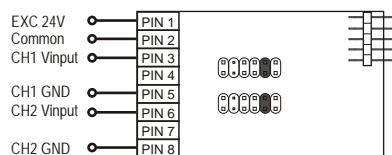

66:  $\pm 20V$  DC with Excitation +24V

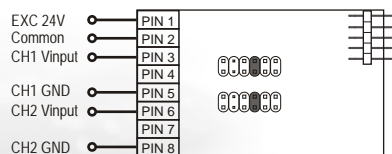


77:  $\pm 200V$  DC with Excitation +24V

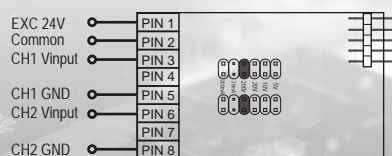


## Single Channel Signal Input Module: (for Single Channel Models)


01: 4~20mA DC with Excitation +24V

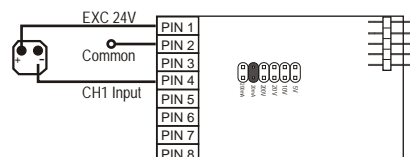


02: 0~20mA DC with Excitation +24V

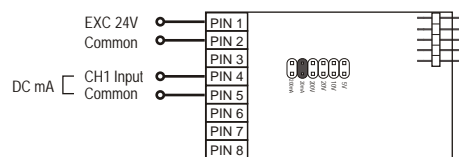


03: 0~200mA DC with Excitation +24V

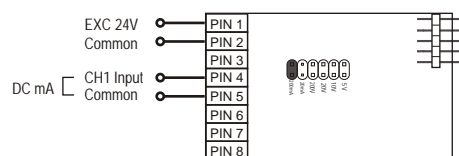


04:  $\pm 5V$  DC with Excitation +24V

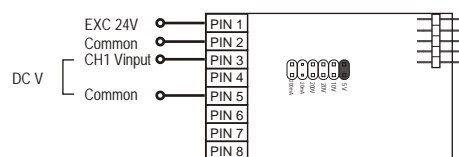


05:  $\pm 10V$  DC with Excitation +24V

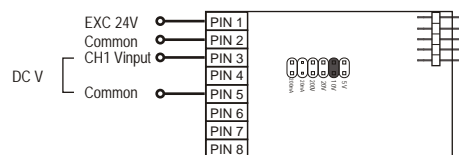

06:  $\pm 20V$  DC with Excitation +24V

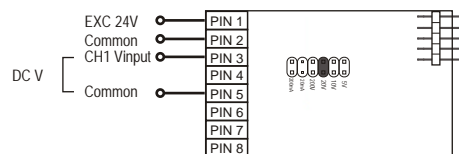

07:  $\pm 200V$  DC with Excitation +24V

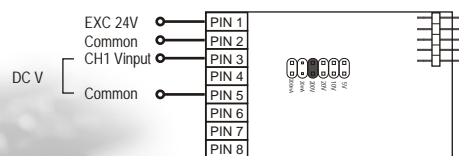


# SIM (Signal Input Module)


This section will elaborate how to adapt to different input signals in the PB series panel meter, by using the correct jumper and using iSEL command. Panel meter series can accommodate 6 types of conventional input signals, 20mA, 200mA, 5V, 10V, 20V, 200V, please refer below for setup.

## Single Channel Signal Input Module: (for Single Channel Models)


A1: 2mA AC Scaled RMS

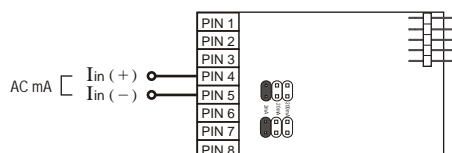


B1: 100mV AC Scaled RMS

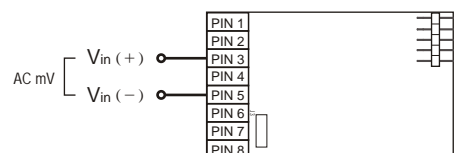


A2: 20mA AC Scaled RMS

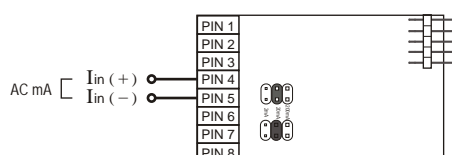


B2: 200mV AC Scaled RMS

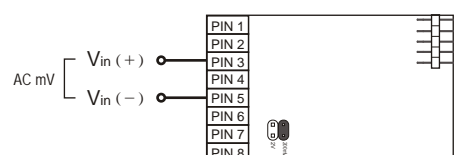


A3: 200mA AC Scaled RMS

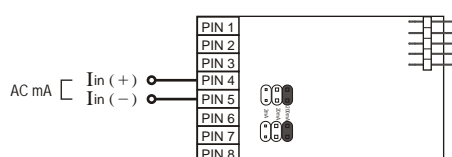


B3: 2V AC Scaled RMS

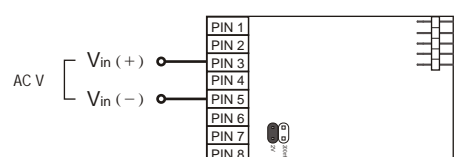


A4: 1Amp AC Scaled RMS

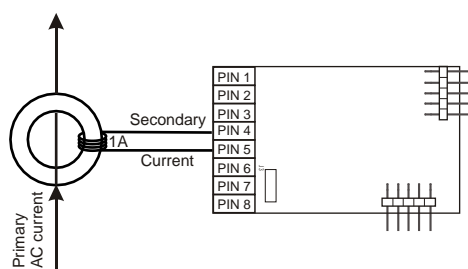


B4: 20V AC Scaled RMS

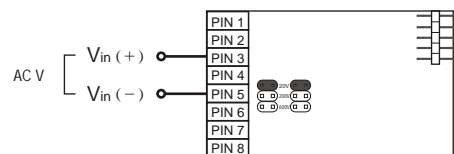


A5: 5 Amp AC Scaled RMS

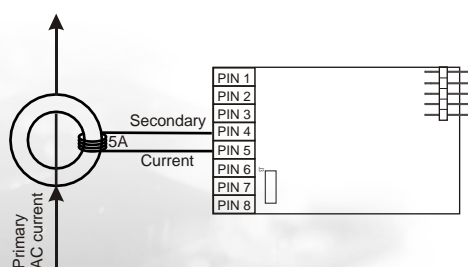

B5: 200V AC Scaled RMS

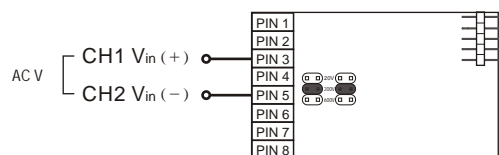

B6: 600V AC Scaled RMS

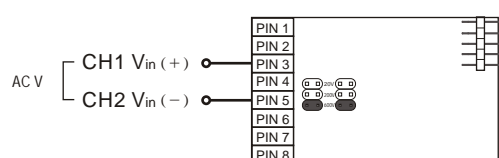




# SIM (Signal Input Module)


This section will elaborate how to adapt to different input signals in the PB series panel meter, by using the correct jumper and using iSEL command. Panel meter series can accommodate 6 types of conventional input signals, 20mA, 200mA, 5V, 10V, 20V, 200V, please refer below for setup.

## Single Channel Signal Input Module: (for Single Channel Models)


C1:  $\pm 2\text{mA}$  DC with Excitation +24V

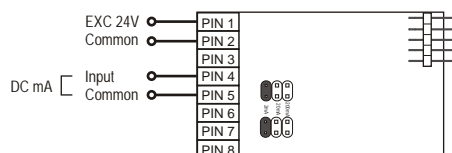


D1:  $\pm 20\text{ mV}$  DC with Excitation +24V

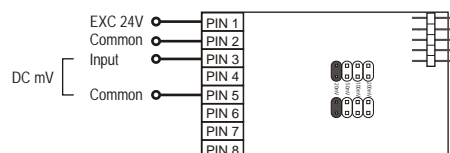


C2:  $\pm 20\text{mA}$  DC with Excitation +24V

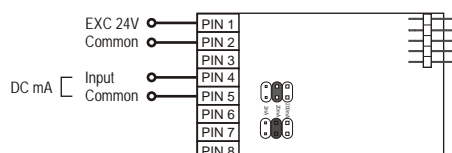


D2:  $\pm 50\text{ mV}$  DC with Excitation +24V

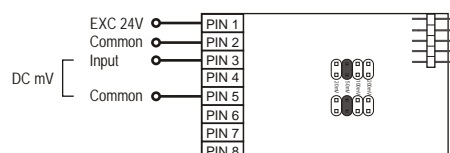


C3:  $\pm 200\text{mA}$  DC with Excitation +24V

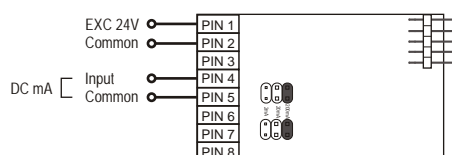


D3:  $\pm 100\text{ mV}$  DC with Excitation +24V

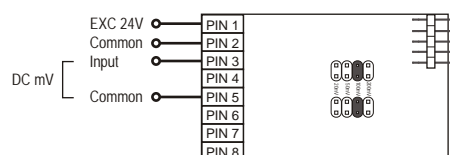


C4:  $\pm 1\text{A}$  DC

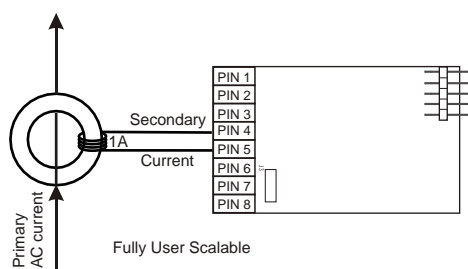

D4:  $\pm 200\text{ mV}$  DC with Excitation +24V

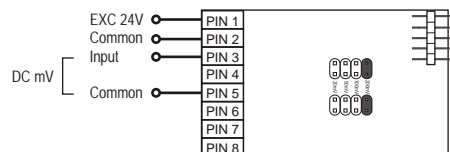

C5:  $\pm 5\text{A}$  DC

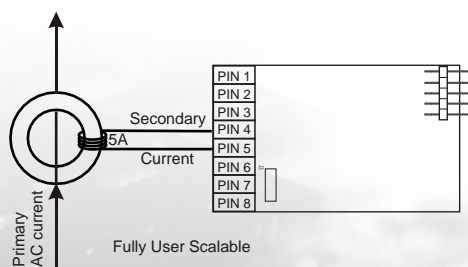


# SIM (Signal Input Module)


This section will elaborate how to adapt to different input signals in the PM series panel meter, by using the correct jumper and using iSEL command. Panel meter series can accommodate 6 types of conventional input signals, 20mA, 200mA, 5V, 10V, 20V, 200V, please refer below for setup.

## Dual Channel Signal Input Module: (for Dual Channel Models)


11: 4~20mA DC with Excitation +24V

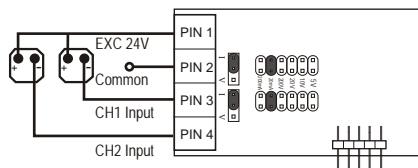


22: 0~20mA DC with Excitation +24V

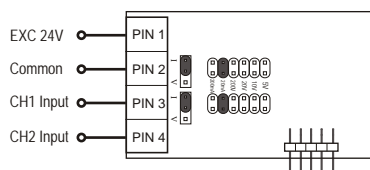


33: 0~200mA DC with Excitation +24V

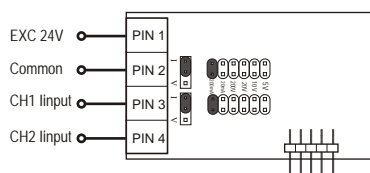


44:  $\pm 5V$  DC with Excitation +24V

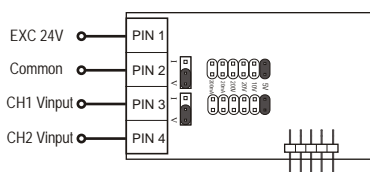


55:  $\pm 10V$  DC with Excitation +24V

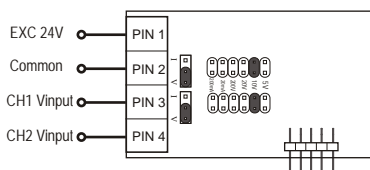

66:  $\pm 20V$  DC with Excitation +24V

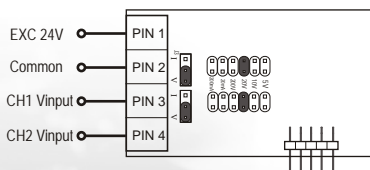


77:  $\pm 200V$  DC with Excitation +24V

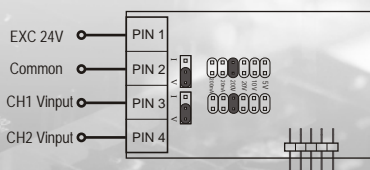


## Single Channel Signal Input Module: (for Single Channel Models)


01: 4~20mA DC with Excitation +24V

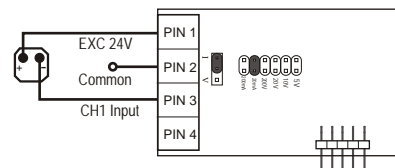


02: 0~20mA DC with Excitation +24V

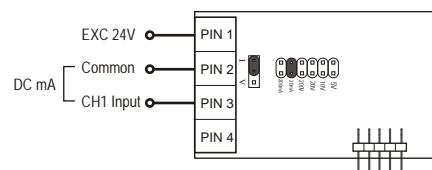


03: 0~200mA DC with Excitation +24V

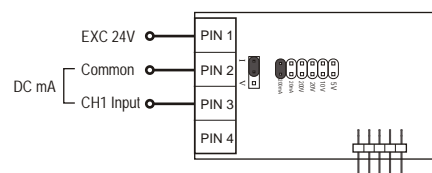


04:  $\pm 5V$  DC with Excitation +24V

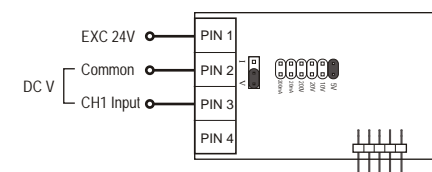


05:  $\pm 10V$  DC with Excitation +24V

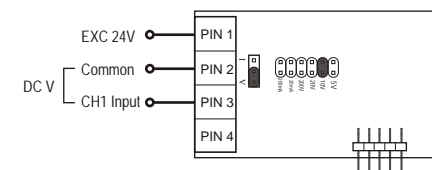

06:  $\pm 20V$  DC with Excitation +24V

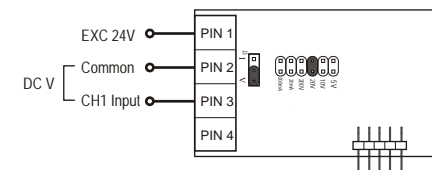

07:  $\pm 200V$  DC with Excitation +24V

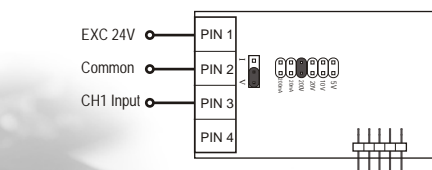


# SIM (Signal Input Module)


This section will elaborate how to adapt to different input signals in the PM series panel meter, by using the correct jumper and using iSEL command. Panel meter series can accommodate 6 types of conventional input signals, 20mA, 200mA, 5V, 10V, 20V, 200V, please refer below for setup.

## Single Channel Signal Input Module: (for Single Channel Models)


A1: 2mA AC Scaled RMS

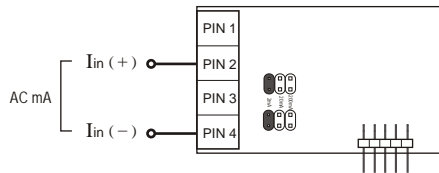


B1: 100mV AC Scaled RMS

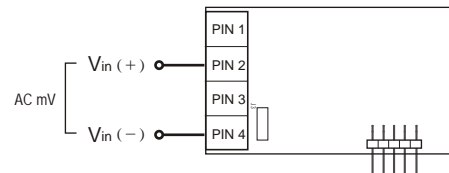


A2: 20mA AC Scaled RMS

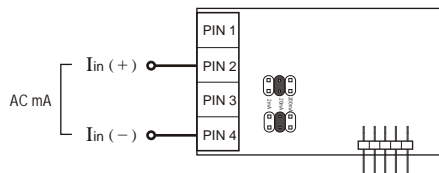


B2: 200mV AC Scaled RMS

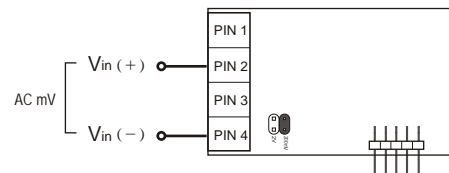


A3: 200mA AC Scaled RMS

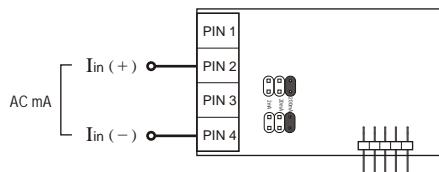


B3: 2V AC Scaled RMS

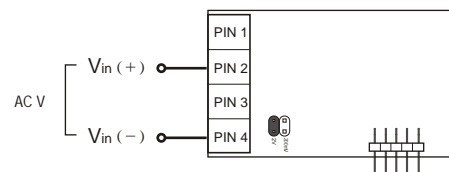


A4: 1Amp AC Scaled RMS

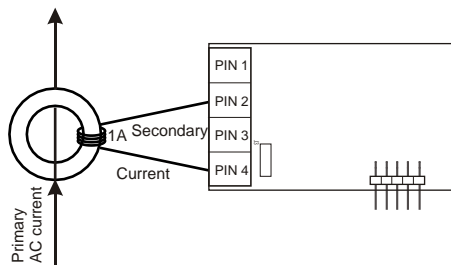


B4: 20V AC Scaled RMS

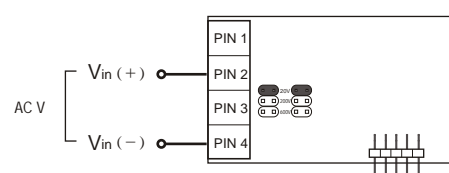


A5: 5 Amp AC Scaled RMS

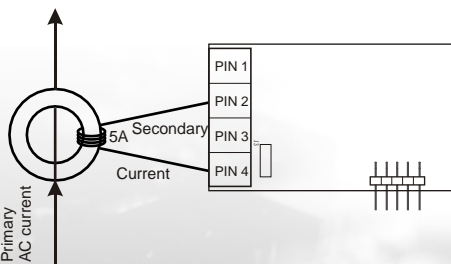

B5: 200V AC Scaled RMS

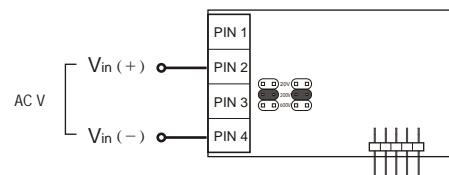

B6: 600V AC Scaled RMS

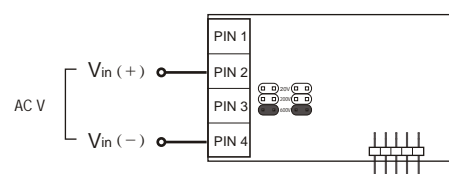


# SIM (Signal Input Module)


This section will elaborate how to adapt to different input signals in the PM series panel meter, by using the correct jumper and using iSEL command. Panel meter series can accommodate 6 types of conventional input signals, 20mA, 200mA, 5V, 10V, 20V, 200V, please refer below for setup.

## Single Channel Signal Input Module: (for Single Channel Models)


C1:  $\pm 2\text{mA}$  DC with Excitation +24V

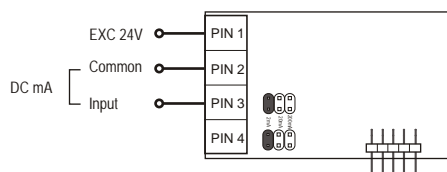


D1:  $\pm 20\text{ mV}$  DC with Excitation +24V

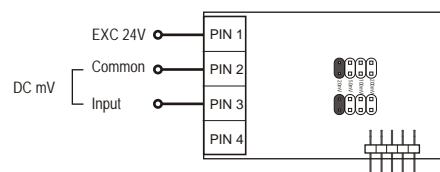


C2:  $\pm 20\text{mA}$  DC with Excitation +24V

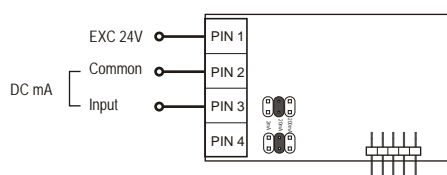


D2:  $\pm 50\text{ mV}$  DC with Excitation +24V

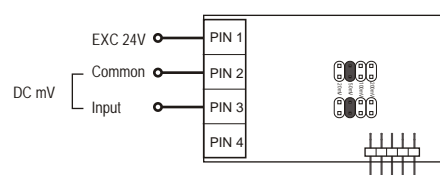


C3:  $\pm 200\text{mA}$  DC with Excitation +24V

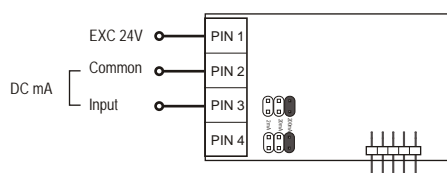


D3:  $\pm 100\text{ mV}$  DC with Excitation +24V

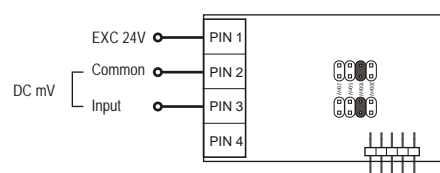


C4:  $\pm 1\text{A}$  DC

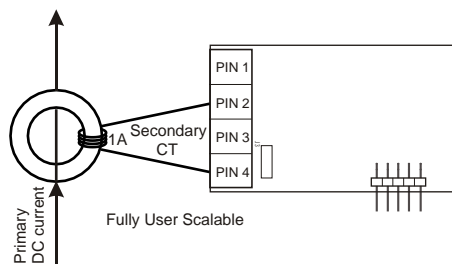

D4:  $\pm 200\text{ mV}$  DC with Excitation +24V

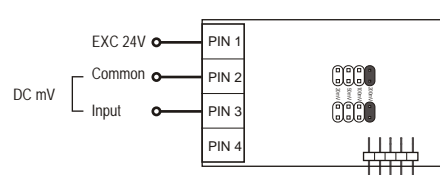

C5:  $\pm 5\text{A}$  DC

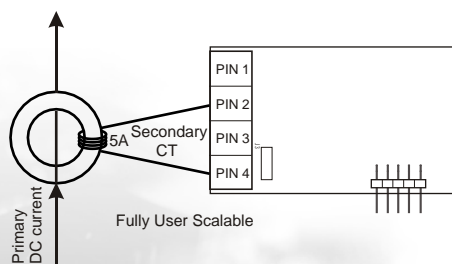

## Microprocessor Bargraphic Display Scaling Meter

- Dual Channel, dual Bargraph and dual Analog output Capability
- Non-Linear Vessel Volume conversion/software
- Modularized Signal Input Support all process signals and ACV, ACA.....
- Modularized Option Output Support up to 8 Relays, 2 Analog outputs and RS485 interface.
- Inputs and Outputs are isolated
- ModBus Communication Protocol
- Wide Range Power Supply: 85~265Vac or 18~36Vdc
- IP-65 Class Front Panel



CE

## Microprocessor Based PID Temperature Controller

- Multi range input T/C, RTD
- PID or FUZZY control processes
- Wide power supply range: 85~265Vac
- RS-485 communication ModBus protocol
- Pass word protection function



CE

## Standard & Explosion Proof Designed Terminal Box



CE

## Microprocessor Power Quality Meter

- Monitoring RMS Voltage, Current, Frequency, Power Factor
- Monitoring Power Functions: Active Power (Watts), Reactive Power (vars), Apparent Power (VA)
- Monitoring Energy Functions: Active Energy (MWh), Reactive Energy (Mvarh), Apparent Energy (MVAh)
- Monitoring Demand Function: Power Demand
- Power Quality Harmonics: THD Voltage, THD Current Harmonic distortion
- Relay function for over-Voltage, Over-Current
- Voltage Pulse output function for power overload

## Microprocessor Counter

- 6 Counting Mode
- Standard DIN 48 x 48 and 72 x 72 and 96 x 48 housing Memory Retention
- Counting pulse 10 KHz max
- Wide power supply range: 85 ~ 265Vac
- RS-485 communication ModBus protocol
- Sensor supply: 12 VDC 100mA
- 2 Relay output



CE



**FineTek Co., Ltd.**

No.16, Tzuchiang St., Tucheng Industrial Park, Taipei Hsien, Taiwan  
Tel: 886-2-22696789 Fax: 886-2-22686682  
e-mail: info@fine-tek.com http://www.fine-tek.com

