


PRINCIPLE

The "Magnet Float Level Indicator" is composed of the float and sensing rod (shown as below). As the float raised or lowered by liquid level, the sensing rod will have a resistance output, which is directly proportional to the liquid level. Also, the float level indicator can be equipped with the TAB-2100 (please see page 3) to produce a 0/4~20mA signal. In addition, we can use with PB series bargraphic display scaling panel meter for level control and display. Anyway, "Magnet Float Level Indicator" is a great benefit to all kinds of industries with its easy working principle and reliability.

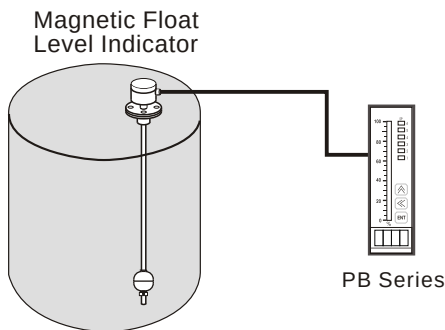

FEATURES


- Every sensing element is protected by a plastic Package, safety in use and transport. (as fig. 1)
- High performance and reliability of electric circuit Modular designed (as fig.2).
- Lower installation costs, less maintenance, reduced personnel training, and decreased plant shock down time.

APPLICATIONS


Applied for waste water treatment turn-key facility, Electric power plant, shipping vessel, hydraulic facility, chemical industrial equipment, petrochemical industry and hot coal boiler. e.g. diesel engine generator, motor oil meter, oil material storage tank.

SCHEMATIC DIAGRAM OF THE PRINCIPLES

1. Sensing Rod
2. Float
3. Transmitter
4. Display Unit



CONSTRUCTION

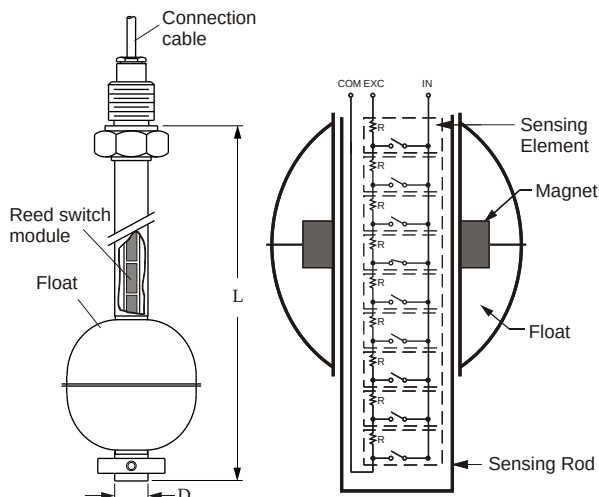

Sensing Element Size


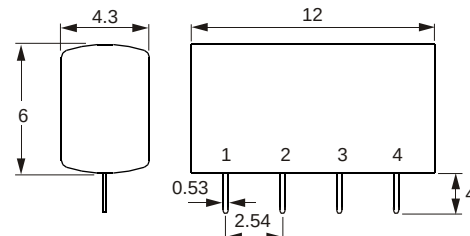


Fig.2














Fig.1
Sensing Element

HOUSING DIMENSION

B Material : Aluminum Enclosure : IP65 Max.Temp.: -20°C ~200°C 	D Explosion-proof   Material : Aluminum Enclosure : NEPSI Ex d IIC T3~T6 ATEX  II 2G EEx d IIB T3~T6 ATEX  II 2D IP65 T3~T6 Max.Temp.: -20°C ~200°C	G  Material : PC Enclosure : IP65 Max.Temp.: -20°C ~80°C
K Explosion-proof   Material : Aluminum Enclosure : CESI 03 ATEX 108  II 2G EEx d IIC T6 Max.Temp.: -20°C ~100°C	N Explosion-proof   Material : SUS316 Enclosure : NEPSI Ex d IIC T3~T6 ATEX  II 2G EEx d IIB T3~T6 ATEX  II 2D IP65 T3~T6 Max.Temp.: -20°C ~200°C	X  Material : Aluminum Enclosure : IP65 Max.Temp.: -20°C ~100°C



● FLOAT SPECIFICATION

Dimension	Type	AxBxC(mm)	S.G.	Max. Pressure (kg/cm ²)	Material	Max. Temp. (°C)	Approx. Weight (g)
	S3	45x55x15	0.65	12	SUS 316	200°C	37.6
	S6	75x108x19	0.5	10	SUS 304	200°C	165
	S4	52x52x15	0.55	30	SUS 316	200°C	33.4
	S5	75x73x19	0.65	30	SUS 304	200°C	102.4
	S8	100x100x20	0.5	30	SUS 304	200°C	249.7
	S9	150x150x30	0.45	30	SUS 304	200°C	534
	P3	48x45x18.5	0.6	5	PP	80°C	35.5
	F4	48x60x18	0.75	5	PVDF	120°C	65.3



TRANSDUCER

MODEL: TAB-2100 Transducer

Voltage Supply : Loop power 12~32VDC
Output Current : 4~20mA
Load Resistance : $RL(\text{Max})=50(Vs-8)$
Operation Temperature: 0 °C~70°C
Ambient Humidity : 0 °C~80°C RH
Accuracy : $\pm 0.1\%(25^\circ\text{C})$
Temperature Effect : 0.5%FS
Adjustment Range : Span Ajustment 20% FS
Zero Ajustment 5% FS

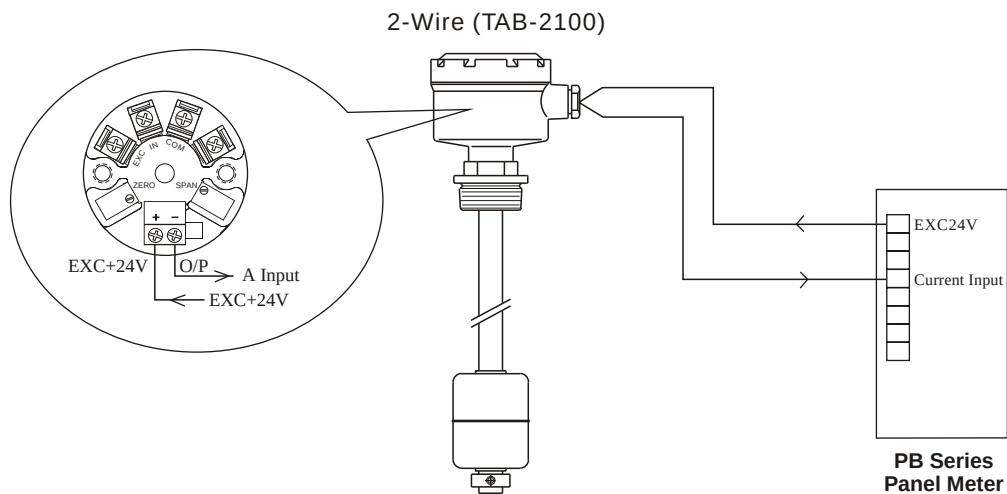

ECONOMICAL

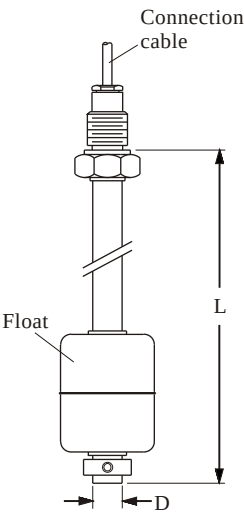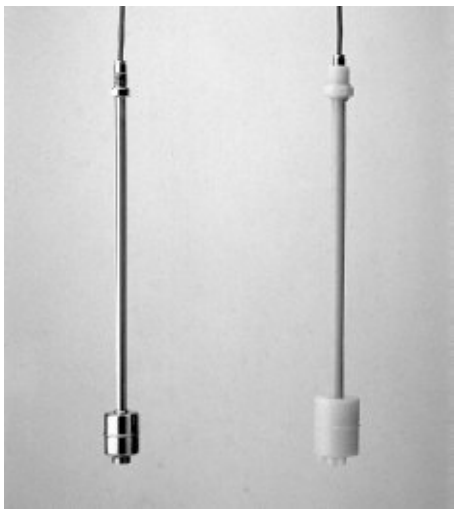

● SPECIFICATION

Connection Cable: Silicon cable 3C × 1M
Output: 3-wire resistance output
Ambient Temp.: 60 °C


Operating Temp.: PP tube -10 °C ~ 80 °C
 PVDF tube -20 °C ~ 120 °C
 SUS tube -20 °C ~ 120 °C

Order No.	Connecting	Tube size & Material (D)	Float type & Material	Suitable S.G.	Measuring Range
FG□-AR4	3/8"PF	φ14 SUS 304 SUS 316	S3: φ45x55 SUS 316 S4: φ52x52 SUS 316	>0.5	FGA...Max.6M FGB...Max.6M
FG□-AR7	3/8"PF	φ17.2 SUS 304	S5: φ75x73 SUS 304 S6: φ75x108 SUS 304	>0.5	FGA...Max.6M FGB...Max.6M
FGB-CR5P3	3/4"PF	φ17.2 PP	P3: φ48x45 PP	>0.6	FGB...Max.6M
FGB-CR6F4	3/4"PF	φ16 PVDF	F4: φ48x60 PVDF	>0.8	FGB...Max.6M


MODEL : FG □ - □ □ □ □ □ □ □ □

- Length (unit: mm)
- Float Type (see page 2)
- Tube Type (see page 9)
- Connecting Type (see page 9)
- Resolution (see page 9)
- A: 6.35mm (3 wire)
- B: 12.7mm (3 wire)

STANDARD

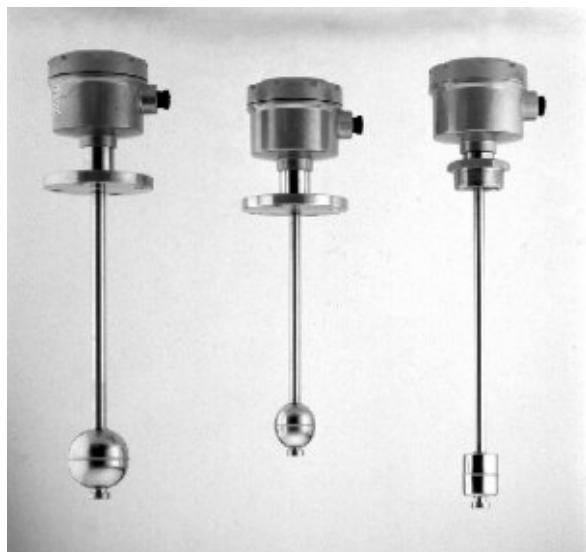

★ B type housing, dimension see page 2.

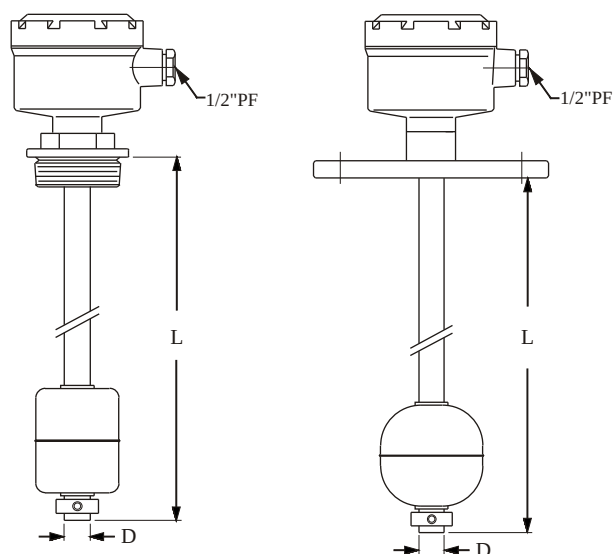

● SPECIFICATION

Terminal Housing: Aluminum, IP65
Output: 4~20mA, 2-wire resistance output


Operating Temp.: -20 °C ~ 120 °C
Ambient Temp.: 60 °C

Order No.	Connecting	Tube size & Material (D)	Float type & Material	Suitable S.G.	Measuring Range
FG□BFQ4	2"NPT	φ14 SUS 316 SUS 304	S3: φ45x55 SUS 316 S4: φ52x52 SUS 316	>0.5	FGC/D...Max.6M
FG□BGN4	2-1/2"x10kg/cm ²	φ14 SUS 316 SUS 304	S3: φ45x55 SUS 316 S4: φ52x52 SUS 316	>0.5	FGC/D...Max.6M
FGDBHN7	3"x10kg/cm ²	φ17.2 SUS 304	S5: φ75x73 SUS 304 S6: φ75x108 SUS 304	>0.45	FGD...Max.6M
FGDBIQ7	4"NPT	φ17.2 SUS 304	S8: φ100x100 SUS 304	>0.5	FGD...Max.6M
FGDBKN8 FGDBKN9	6"x10kg/cm ²	φ21.7 φ27.2 SUS 304	S9: φ150x150 SUS 304	>0.45	FGD...Max.12M


MODEL : FG□ B □ □ □ □ □ □ □ □

Length (unit: mm)
 Float Type (see page 2)
 Tube Type (see page 9)
 Connecting Type (see page 9)
 Housing Type (see page 2)
 Resolution (see page 9)
 C: 6.35mm (2 wire)
 D: 12.7mm (2 wire)

ANTI-ACID / ALKALINE

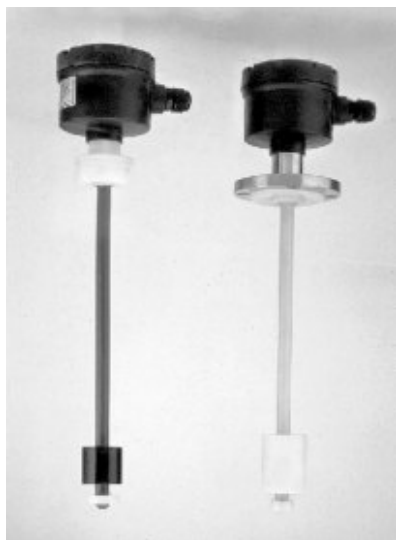

★ C type housing, dimension see page 2.

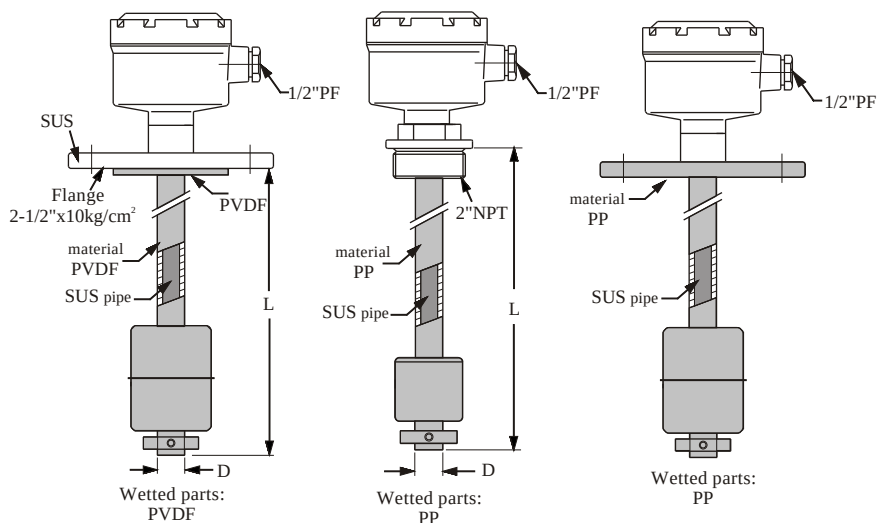

● SPECIFICATION

Terminal Housing: PP +Fiber, IP65

Output: 4~20mA, 2-wire resistance output

Ambient Temp.: 60 °C

Operating Temp.: PP jacket tube -10 °C ~ 80 °C

PVDF jacket tube -20 °C ~ 120 °C


Order No.	Connecting	Tube size & Material (D)	Float type & Material	Suitable S.G.	Measuring Range
FGDCFQ5P3	2"NPT	φ17.2 PP	P3: φ48x45 PP	>0.5	FGD...Max.6M
FGDCFQ6F4	2"NPT	φ16 PVDF	F4: φ48x60 PVDF	>0.8	FGD...Max.6M
FGDCGN5P3	2-1/2"x10kg/cm²	φ17.2 PP	P3: φ48x45 PP	>0.6	FGD...Max.6M
FGDCGN6F4	2-1/2"x10kg/cm²	φ16 PVDF	F4: φ48x60 PVDF	>0.8	FGD...Max.6M

Every unit is protected by PP or PVDF jacket to prevent the sensing rod from chemical corrosion.

MODEL : FG DC□□□□□□□□



Terminal Housing: K type --- Aluminum, ATEX EEx d IIC T6	Operating Temp.: PP tube	-10°C ~ 80°C
Output: 4~20mA, 2-wire resistance output	PVDF tube	-20°C ~ 120°C
Ambient Temp.: 60 °C	SUS tube	-20°C ~ 120°C

MODEL : FG 

Length (unit: mm)

Float Type (see page 2)

Tube Type (see page 9)

Connecting Type (see page 9)

Housing Type (see page 2)


Resolution (see page 9)

C: 6.35mm (2 wire)


D: 12.7mm (2 wire)

INSTALLATION


- The float level indicator should be mounted far away from liquid inlet, any strong liquid Fluctuation will produce error output signals.

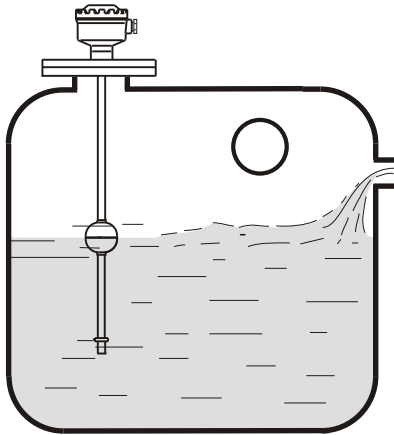


- It is requested a pipe shield or equivalent Device to normalize the indicator actuation if the indicator is used with any agitator Application.

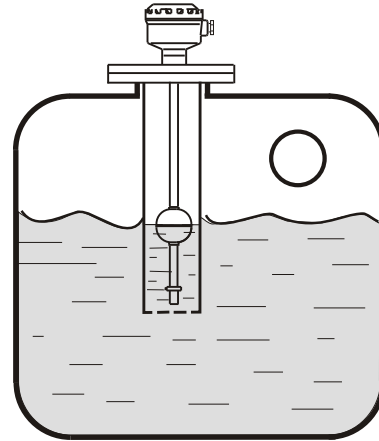

- It had better require an L type supporter, when the level indicator is mounted in concrete wall tank as figure below.

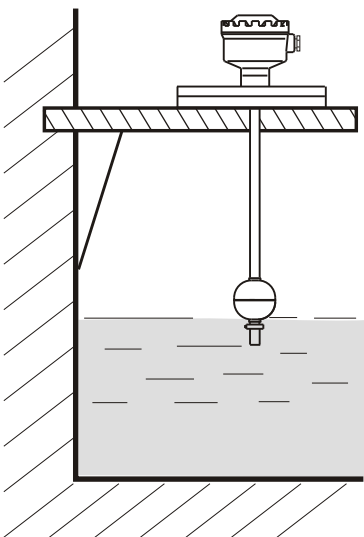

- It is recommended to select the standpipe with diameter(d) larger than the float ball for Installation process.

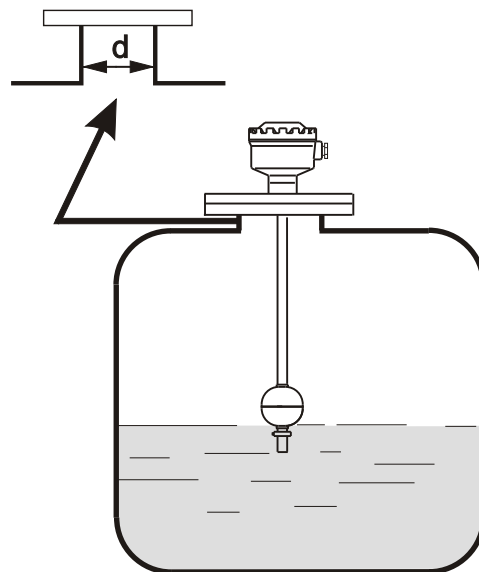

ORDER INFORMATION

FG D C FQ 6 F1 1500 (P)

RESOLUTION

- A: 6.35mm (3-wire)
- B: 12.7mm (3-wire)
- C: 6.35mm (2-wire)
- D: 12.7mm (2-wire)

TERMINAL HOUSING (see page 2)

- B: Aluminum (IP65) - : None
- C: P.P (IP65) S : Others
- D: Aluminum (Ex d IIB T3~T6)
- E: AL. (Small space) IP65
- G: PC (IP65)
- K: Aluminum (Ex d IIB T3~T6)
- N: SUS (Ex d IIB T3~T6)

CONNECTING TYPE

- A: 3/8" (10A) I : 4" (100A) P : 300 Lbs
- B: 1/2" (15A) J : 5" (125A) Q: PT
- C: 3/4" (20A) K : 6" (150A) R: PF(G)
- D: 1" (25A) 4 : 7" (175A) T : BSP
- E: 1 1/2" (40A) 5 : 8" (200A) U: NPT
- F: 2" (50A) M: 5 Kg/cm² V: GAS
- G: 2 1/2" (65A) N :10 Kg/cm² S : Others
- H: 3" (80A) O : 150 Lbs

※ Tri-Clamp 1-1/2"=ES; 2"=FS

TUBE TYPE & MATERIAL

- 0: ϕ 12.7 (SUS304) C: ϕ 12.7 (SUS316)
- Only available for resolution 12.7mm. Only available for resolution 12.7mm.
- 4: ϕ 14 (SUS304) B: ϕ 14 (SUS316)
- 5: ϕ 17.2 (P.P.) D: ϕ 17.2 (SUS316)
- 6: ϕ 16 (PVDF) E: ϕ 21.7 (SUS316)
- 7: ϕ 17.2 (SUS304) F: ϕ 27.2 (SUS316)
- 8: ϕ 21.7 (SUS304)
- 9: ϕ 27.2 (SUS304)

FLOAT TYPE (see page 2)

Material	Type					
Plastic	P3	F4				
SUS	S3	S4	S5	S6	S8	S9

LENGTH (UNIT : mm)

- 0500: 50cm (01~50) ※ 50cm per Unit
- 1000: 100cm (51~100)
- 1500: 150cm (101~150)


PIPE SHIELD

- ★ Tolerance of the total product length is ± 5 mm.
- ★ Characteristics, specifications and dimensions are subject to change without notice.
- ★ Please contact us for further informations.

ENCLOSURE EXPLOSION PROOF (PLASTIC JACKET)

★ D or N type housing can be selected, dimension see page 2.

NEPSI PROOF No. GYJ06231 Ex d IIC T3~T6
PTB PROOF No. 05 ATEX 1028  **II 2G EEx d IIB T3~T6**
II 2D IP65 T3~T6

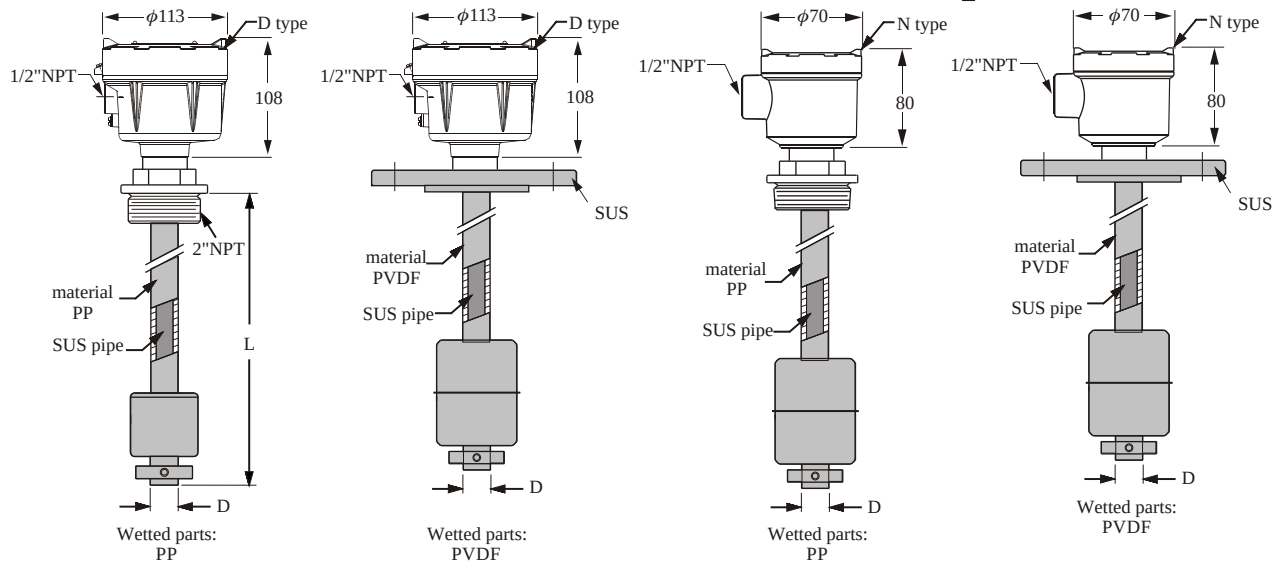

● SPECIFICATION

Terminal Housing: D type --- Aluminum, Ex d IIB T3~T6
 N type --- SUS, Ex d IIC T3~T6

Output: 4~20mA, 2-wire resistance output

Ambient Temp.: 60 °C

Operating Temp.: PP tube -10 °C ~ 80 °C
 PVDF tube -20 °C ~ 120 °C
 SUS tube -20 °C ~ 120 °C

ORDER NO. FG7 MODEL NO. RL7	Connecting	Tube size & Material (D)	Float type & Material	Suitable S.G.	Measuring Range
RL7□DFQ4	2"NPT	φ14 SUS 316	S3: φ45x55 SUS 316	>0.5	RL7...Max.3M
RL7□DGN4	2-1/2"x10kg/cm ²	φ14 SUS 316	S3: φ45x55 SUS 316	>0.5	RL7...Max.3M
RL7DDHN7	3"x10kg/cm ²	φ17.2 SUS 304	S5: φ75x73 SUS 304	>0.45	RL7...Max.6M
RL7DDIQ4	4"NPT	φ17.2 SUS 304	S8: φ100x100 SUS 304	>0.5	RL7...Max.6M
RL7DDKN8 RL7DDKN9 RL7DDKN8 RL7DDKN9	6"x10kg/cm ²	φ21.7 φ27.2 SUS 304	S9: φ150x150 SUS 304	>0.45	RL7...Max.6M
RL7DDFQ5P3	2"NPT	φ17.2 PP	P3: φ48x45 PP	>0.6	RL7...Max.6M
RL7DDFQ6F4	2"NPT	φ16 PVDF	F4: φ48x60 PVDF	>0.8	RL7...Max.6M
RL7DDGN5P3	2-1/2"x10kg/cm ²	φ17.2 PP	P3: φ48x45 PP	>0.6	RL7...Max.6M
RL7DDGN6F4	2-1/2"x10kg/cm ²	φ16 PVDF	F4: φ48x60 PVDF	>0.8	RL7...Max.6M

ORDER NO.:FG7 ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐
 MODEL NO.:RL7 ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Length (unit: mm)
 Float Type (see page 2)
 Tube Type (see page 11)
 Connecting Type (see page 11)
 Housing Type (see page 2)
 Resolution (see page 11)
 C: 6.35mm (2 wire)
 D: 12.7mm (2 wire)

CODE NAME INFORMATION

Order No. FG7 **D** **D** **FQ** **6** **F1** **1500** (L)
 Model No. RL7 **D** **D** **FQ** **6** **F1** **1500** (L)

RESOLUTION

- A: 6.35mm (3-wire)
- B: 12.7mm (3-wire)
- C: 6.35mm (2-wire)
- D: 12.7mm (2-wire)

TERMINAL HOUSING (see page 2)

- D: AL (EEx d IIB T3~T6)
- N: SUS (EEx d IIB T3~T6)

CONNECTING TYPE

- | | | |
|-----------------|--------------------------|-------------|
| A: 3/8" (10A) | I : 4" (100A) | P : 300 Lbs |
| B: 1/2" (15A) | J : 5" (125A) | Q: PT |
| C: 3/4" (20A) | K : 6" (150A) | R: PF(G) |
| D: 1" (25A) | 4 : 7" (175A) | T : BSP |
| E: 1 1/2" (40A) | 5 : 8" (200A) | U: NPT |
| F: 2" (50A) | M: 5 Kg/cm ² | V: GAS |
| G: 2 1/2" (65A) | N: 10 Kg/cm ² | S : Others |
| H: 3" (80A) | O: 150 Lbs | |

TUBE TYPE & MATERIAL

- 0: ϕ 12.7 (SUS) Only available for resolution 12.7mm.
- 4: ϕ 14 (SUS) 7: ϕ 17.2 (SUS)
- 5: ϕ 17.2 (P.P.) 8: ϕ 21.7 (SUS)
- 6: ϕ 16 (PVDF) 9: ϕ 27.2 (SUS)

FLOAT TYPE (see page 2)

Material	Type					
Plastic	P3	F4				
SUS	S3	S4	S5	S6	S8	S9

LENGTH (UNIT : mm)

- 0500:** 50cm (01~50) ※ 50cm per Unit
- 1000:** 100cm (51~100)
- 1500:** 150cm (101~150)

TAG

- ★ Tolerance of the total product length is ± 5 mm.
- ★ Characteristics, specifications and dimensions are subject to change without notice.
- ★ Please contact us for further informations.